

# 3212-7000 Series


## Network Video Recorder



3212-7000 Front

### Key Features

- Designed for use with the 3212-2000 Thermal Imaging Radiometric Detection Camera
- 3TB and 6TB storage models
- 1 RJ45 10M/100M network interface
- Integrated 4 port 10M/100M PoE network switch
- Simultaneous HDMI and VGA Output

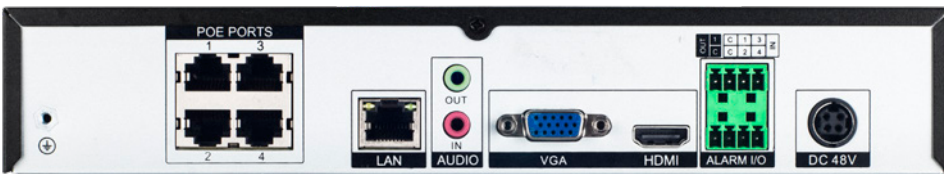

3212-7000 Rear

The CostarHD 3212-7000 is an adaptive recoding appliance designed to work with the 3212-2000 Thermal Imaging Radiometric Detection Camera. This network recording appliance is designed to work with up to 4 thermographic cameras.

Offered in a 3TB and 6TB option the flexible storage options will allow you to store as much or a little footage as you desire. The integrated PoE switch allows for a quick, simple, and effortless installation between the camera and the recording appliance.



[youtube.com/CostarHD](https://www.youtube.com/CostarHD)  
[linkedin.com/company/CostarHD](https://www.linkedin.com/company/CostarHD)  
[twitter.com/CostarHD](https://twitter.com/CostarHD)  
[facebook.com/CostarHD](https://www.facebook.com/CostarHD)  
[CostarHD.com](http://CostarHD.com)

©CostarHD™, LLC reserves the right to change specifications without notice

(858) 391-1800

# COSTAR HD

# 3212-7000 Series

## Network Video Recorder



### VIDEO OUTPUT

Interface	1 HDMI, 1 VGA
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1280×1024, 1280×720
Multi-Screen Display	Mirrored displays with up to 4 video panes

### RECORDING

Record Mode	Manual, Schedule (Regular, Continuous), Motion Detection, Video Loss, Camera Tamper, Alarm in.
Trigger Events	Motion Detection, Video Loss, Alarm in

### VIDEO DETECTION AND ALARM

Trigger Events	Recording, Buzzer, Push message, Pop up message.
Video Detection	Motion Detection, Video Loss, Camera Tamper

### PLAYBACK AND BACKUP

Sync Playback	4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device

### NETWORK

Interface	1 RJ-45 port (10/100Mbps)
PoE Interface	4 ports (IEEE 802.3af), 40W
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	9 users
Interoperability	ONVIF, SDK, CGI

### STORAGE

Internal HDD	1 SATA HDD, up to 6TB
--------------	-----------------------

### INTERFACE

Audio I/O	1 Input, 1 Output
Alarm Input	4 Inputs
Alarm Output	1 Output
USB	2 ports (USB 2.0)

### ELECTRICAL

Power Supply	48VDC/1.25A
Power Consumption	< 5W (without HDD)

### MECHANICAL

Dimensions	255(W) × 235(D) × 47.5(H)mm 10(W) × 9.25(D) × 1.87(H)in.
Net Weight	3.4lbs. (1.54kg)

### ENVIRONMENTAL

Operating Temp.	-10°C ~ 50°C (14°F ~ 122°F)
Storage Conditions	Less than 90% RH

### CERTIFICATIONS


CE, FCC

### ORDERING INFORMATION

- 3212-7003** 3TB NVR with Integrated PoE Switch
- 3212-7006** 6TB NVR with Integrated PoE Switch

### 3212-2000 DIMENSIONS

Dimension	3212-7000	
	Inches	mm
<b>A</b>	10	255
<b>B</b>	9.25	235
<b>C</b>	1.87	47.5

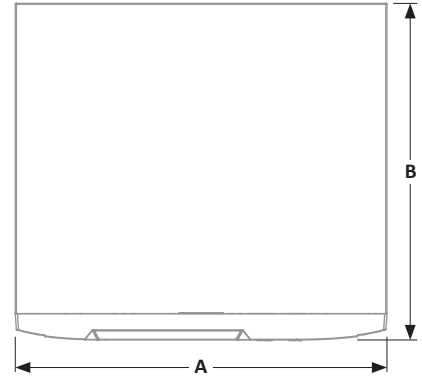

## About CostarHD™

CostarHD is a leading manufacturer of high-definition video systems designed to satisfy the demanding performance requirements for critical infrastructure applications. CostarHD solutions integrate the latest high-definition video imaging and compression technologies into ruggedized camera products for monitoring in critical, sensitive environments.